


Product Description

ProPERLA Wood Impregnator is a water based water repellent treatment for all vertical wooden surfaces including fencing, log cabins, wooden gates & exterior wooden beams. ProPERLA has a special chemical composition that reacts and actively bonds to wooden surfaces, ensuring long-term performance.

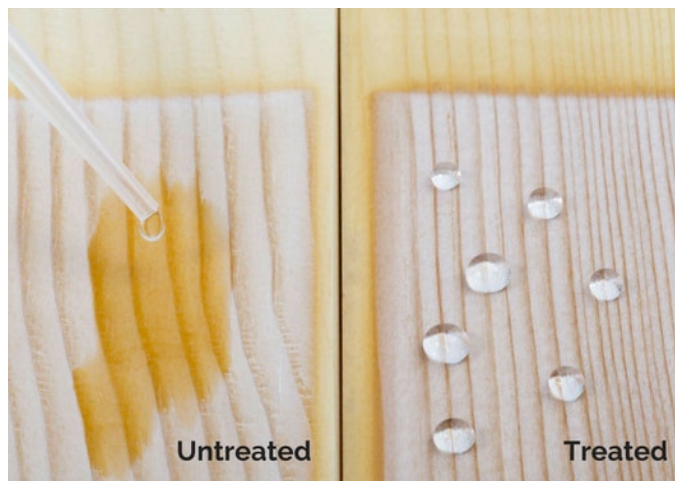

Key Features:

- Super hydrophobic - in conformance with DIN 4108
- Chemically bonds to the substrate
- Highly breathable
- Self-cleaning
- Extends the life span of wood by keeping it dry
- Helps prevent discoloration and rotting
- Does not alter the appearance of wood
- Comes with a 10 year manufacturer's guarantee
- Prevents growth of moss, algae and lichens
- UV resistant
- Minimises salt efflorescence

Properties

Recommended for: For use on bare vertical timber such as fencing & cladding.

Packaging: 5L

Application method: Brush, roller or handheld low-pressure pump

Colour: Clear

Cleaning of tools: Immediately after use with water

Storage: Cool, however above freezing. Seal opened containers well.

Preparation: Older surfaces need to be cleaned prior to apply the impregnator. Strongly faded or surfaces covered with algae and moss must be cleaned previously with ProPERLA Cleaner and then rinsed off. Surfaces under a year old can often be treated directly. See ProPERLA Cleaner data sheet for more information.

Apply ProPERLA Cleaner diluted up to 20 parts water on to all areas that have had moss, mould or fungal growth. Allow to dry for a minimum 3 hours at 20°C. At lower temperatures the drying time will be extended.

Filling work (if applicable): Use a suitable filler according to the processing guidelines.

Coverage: Estimated 5m² per litre

Application: Apply according to the recommended coverage rate of 5m² per litre. If any areas are pooling, redistribute the treatment evenly. ProPERLA Wood Impregnator is a one-coat system.

Drying time: Approximately 1 hour at 20° C. At lower temperatures the drying time will be extended.

